

BRS-120

REFRIGERATED BASES

REFRIGERATED BASES

Refrigerated stand with 2 doors
Incorporated condensing unit -
Temperature: -2°C $+8^{\circ}\text{C}$ - 2 grids GN-1/1 -
170 lt. Refrigerant gas R290



Construction - Fabricated using CrNi 18/10 AISI 304 grade Stainless Steel Scotch-Brite Satin polish Finish, rounded edges and chromed details.
Model - Refrigerated stand with doors and drawers, for professional use.
Condensing unit incorporated, Refrigerant Gas R290. Automatic electric defrosting. Insulation with foam without CFC and HCFC. Fittings -
Appliance is supplied with adjustable feet.




ITALIAN CULINARY ART

The pictures are purely representative. The manufacturer reserves the right to modify the technical data and models without previous notice.

BRS-120

REFRIGERATED BASES

REFRIGERATED BASES

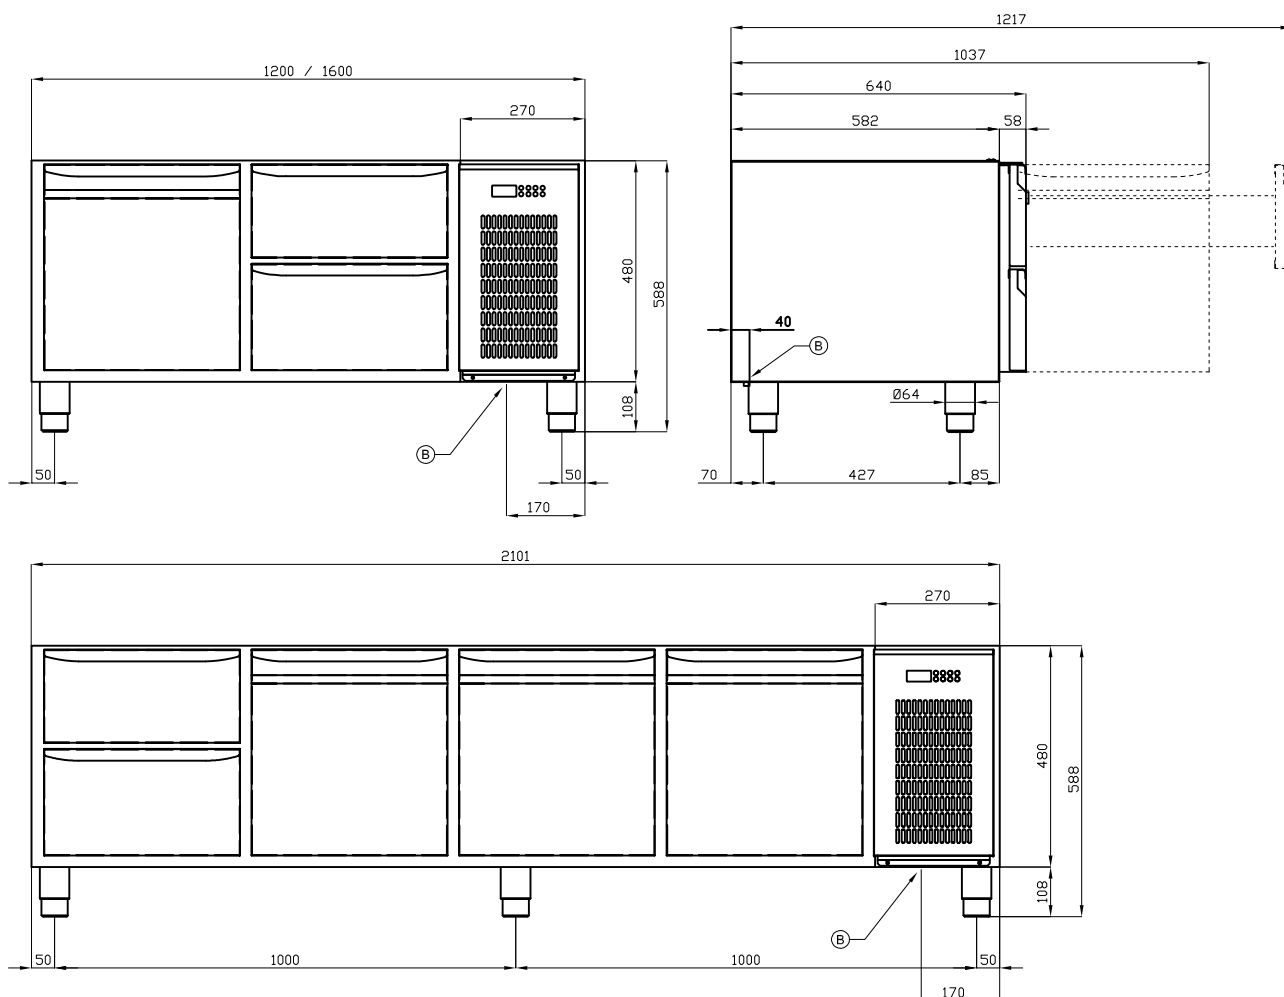

A	Data plate		B	Electrical connection	
---	------------	--	---	-----------------------	--

MODEL: BRS-120
 DIMENSIONS: cm. 120x 63x 59h
 ELECTRIC POWER: 0,25 kW
 VOLTAGE: 230V~
 FREQUENCY: 50 Hz



kg: 80
 m³: 0.73
 mm: 1250x730x800

BUY LOTUS BUY ITALY

The pictures are purely representative. The manufacturer reserves the right to modify the technical data and models without previous notice.



LOTUS S.P.A. Via Calmaor, 46
 31020 San Vendemiano(TV) - Italy
 Tel. + 39 0438 778020 / 778468
 Fax + 39 0438 778277
 www.lotuscookers.it - lotus@lotuscookers.it